

WO 2005/069333

PCT/FI2005/000026

1

SWITCHING DEVICE MODULE

BACKGROUND OF THE INVENTION

[0001] The invention relates to a switching device module according to the preamble of claim 1.

[0002] Switching devices are instruments employed for opening and closing an electric circuit. Switching devices typically comprise a main shaft for controlling the poles of the switching device. Switching devices include switches and switch-fuses, for example.

[0003] A switching device assembly may comprise auxiliary circuits adapted for instance to protect and monitor the switching device. Auxiliary circuits may comprise auxiliary contacts adapted to open and close locking, alarm and position indication circuits, for example. In switch-fuses, the auxiliary circuits may comprise components associated with fuse monitoring. The auxiliary circuits are adapted to substantially lower currents than the electric circuit that the switching device is adapted to open and close.

[0004] The wires of the auxiliary circuits may pass between the switching device and the user interface equipment employed for controlling it. The wires of the auxiliary circuits may also pass for instance from one part to another part of the switching device.

[0005] The placement of the wirings of auxiliary circuits in the assembly space, such as a cubicle, of a switching device is problematic. The wires of the auxiliary circuits that pass outside the switching device take up space and make the installation untidy. The placement of the wirings of the auxiliary circuits is particularly difficult in modular switching devices composed of a plurality of interconnected switching device modules.

BRIEF DESCRIPTION OF THE INVENTION

[0006] The object of the invention is to provide a switching device module allowing the above problems to be solved. The object of the invention is achieved with a switching device module, which is characterized in what is stated in the independent claims. Preferred embodiments of the invention are described in the dependent claims.

[0007] The invention is based on providing the frame of the switching device module with wire troughs into which the wires of the auxiliary circuits can be installed.

[0008] An advantage of the switching device module of the inven-

tion is that it allows the wires of the auxiliary circuits of the switching device to be installed substantially inside the outer sides of the switching device, whereby no space has to be reserved for the wires of the auxiliary circuits on the outside of the frame of the switching device. In addition to space saving, the switching device modules of the invention enable tidy installation of the wires of auxiliary circuits.

[0009] One or more wire troughs of the switching device module of the invention are preferably adapted such that when the switching device module is connected to another switching device module, the wire troughs of the switching device module are interconnected with one or more wire troughs of said other switching device module for drawing at least one auxiliary circuit wire from said one switching device module to said other switching device module.

BRIEF DESCRIPTION OF THE FIGURES

[0010] In the following, the invention will be described in more detail in connection with preferred embodiments with reference to the accompanying drawings, in which

Figure 1a shows the control device module according to an embodiment of the invention seen obliquely from above;

Figure 1b shows the control device module of Figure 1 seen obliquely from below;

Figure 2a shows a side view of the switching device module of a second embodiment of the invention;

Figure 2b shows a top view of the switching device module of Figure 2a in section along line A – B; and

Figure 3 shows a partly sectional view a switching device composed of switching device modules according to the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0011] Figure 1 shows a control device module according to an embodiment of the invention, comprising a frame 2, and a main shaft element 12 and a control shaft element 14 installed therein. The frame 2 of the control device module is substantially in the shape of a rectangular parallelepiped, i.e. box-like. The main shaft element 12 constitutes part of the main shaft of the switching device. The control shaft element 14 is adapted to turn the main shaft element 12. The control shaft element 14 is perpendicular relative to the

main shaft element 12.

[0012] The control device module of Figure 1 comprises two wire troughs 8. Both wire troughs 8 are adapted to receive a plurality of wires of the auxiliary circuits. The wire troughs 8 are placed inside planes defining the outer sides of the frame 2 of the control device module in a manner preventing the wire troughs or the wires to be installed therein from increasing the outer dimensions of the module. The wire troughs 8 extend linearly through the frame 2 in the direction of the main shaft element 12, close to the end sides 18 and 20 of the frame. In their middle portion, the wire troughs 8 also comprise transverse openings 16 enabling the withdrawal of the wires of the auxiliary circuits from the end sides 18 and 20 of the frame. The end sides 18 and 20 are parallel with the plane defined by the axes of revolution of the main shaft element 12 and the control shaft element 14.

[0013] The frame 2 comprises an openable cover part 10. The cover part 10 constitutes a cover side 4, which is an outer side of the frame 2 and perpendicular relative to the control shaft element 14. The cover part 10 provides the wall on the side of the cover side 4 of the wire troughs 8, and part of the walls on the side of the end sides 18 and 20.

[0014] The cover part 10 is adapted to be easily openable. In a preferred embodiment, the cover part 10 is adapted to be detachable without tools. When the cover part 10 is opened, the wires of the auxiliary circuits can be placed into the wire troughs 8 even if said wires were already connected at both ends to the other components of the electric circuit.

[0015] The wire troughs 8 may be interconnected in the space located below the openable cover part 10.

[0016] Figure 2a is a side view of a switching device module according to the invention, which is a modification of the control device module shown in Figure 1. Compared with the module of Figure 1, four wire troughs 28 parallel to the control shaft element 14 have been added to the frame 2 of the control device module. In addition, the transverse openings 16 of the wire troughs 8 have been removed.

[0017] The added wire troughs 28 are located substantially at the corners of the frame 2. Each wire trough 8, parallel to the main shaft element 12, is connected to two wire troughs 28 parallel to the control shaft element 14 in a manner allowing the wire of the auxiliary circuit to pass from one wire trough to another without having to pass outside the sides of the frame 2.

[0018] The wire troughs 28 are entirely open on the side perpendicular to the main shaft element 12, and partly open on the sides facing the end sides 18 and 20. The installation of the wires of the auxiliary circuits to such open wire troughs is easy.

[0019] The wire troughs 28 are provided with transverse openings 26 enabling the withdrawal of the wires of the auxiliary circuit from the end sides 18 and 20 of the frame. These transverse openings 26 replace the transverse openings 16 in the module of Figure 1a.

[0020] The cross-section of the wire troughs 28 is shown in Figure 2b, which is a top view of the switching device module of Figure 2a in section along line A – B. Figure 2b shows that all four wire troughs 28 have a similar cross-section.

[0021] When two switching device modules having cross-sections according to Figure 2b are placed next to one another, the wire troughs 28 of adjacent modules constitute an integrated wire trough having a volume double compared with the volume of the wire trough 28 of a single module.

[0022] The control device modules of Figures 1b and 2a are adapted to be placed in an assembly space, such as a cubicle, in such a manner that the bottom side 6 of the module is adjacent to the wall of the assembly space. Herein, bottom side 6 refers to the side that is parallel to the cover side 4 and located opposite thereto.

[0023] The wall of the assembly space may be grounded, and it is therefore important to prevent live wires from chafing against the wall of the assembly space. In the control device module of Figure 2a, the wire troughs 28 between the cover and bottom sides do not extend up to the bottom side 6 for the aforementioned reason.

[0024] A modular switching device may comprise a control device module and one or more pole cell modules connected thereto. Figure 3 shows a switching device composed of switching device modules according to the invention and comprising a control device module 1 and six pole cell modules 25, three of which are placed on a first side of the control device module 1 when seen in the direction of the main shaft, the remaining three pole cell modules being placed on a second side of the control device module 1.

[0025] In Figure 3, the openable cover parts of all switching device modules are detached. Three pole cell modules 25 of the switching device comprise an auxiliary contact element 30. The auxiliary contact elements are

placed below the cover part, adjacent to the end side 20. One wire 32 originates from each auxiliary contact element 30, and the wire 32 of each auxiliary contact element is drawn along wire troughs placed below the openable covers to a point at the end of the switching device, from which point said wires 32 can be drawn further to the user interface equipment. The common wire trough 8 of the wires 32 of the auxiliary circuits, along which trough the wires pass in the direction of the main shaft, is placed adjacent to the end side 18 of each module.

[0026] If the switching device modules of Figure 3 had no interconnected wire troughs 8, the wires of the auxiliary circuits would have to pass outside the frame of the switching device every time they pass from one module to another. Similarly, if the pole cell modules 25 had no internal wire troughs between the end sides 18 and 20, the wires 32 of the auxiliary contact elements 30 would have to be drawn from adjacent the end side 20 to adjacent the end side 18 outside the module.

[0027] A modular switching device product series may comprise switching device modules having different outer dimensions. In an embodiment of the invention, the wire troughs of the switching device modules are designed in such a manner that in a switching device composed of modules of different sizes of the same product series, the wire troughs of modules of different sizes are interconnected.

[0028] The wires of the auxiliary circuits may comprise not only wires of the auxiliary contacts and the fuse monitors but also measuring lines.

[0029] If the intention is for the switching device module to have a high enclosure class, the wire troughs may be equipped with suitable gaskets. These gaskets may comprise rubber gaskets to be mounted around wires or wire bundles. The enclosure class of the switching device module can also be improved by equipping the opening of each wire trough with a suitable stopper, which is removed only when the wire of an auxiliary circuit is to be drawn through said opening from the inside to the outside of the frame or vice versa.

[0030] It is also feasible to provide the switching device module with the openings of the wire troughs by piercing openings in the wall of the frame at points where the wires of the auxiliary circuit are to pass in said assembly. In this case, areas are preferably arranged in the frame of the switching device module, the areas being adapted for the piercing of the openings. Openings that are pierced according to the need eliminate extra openings in the frame.

The same switching device module may comprise both ready-made openings and areas adapted for the piercing of openings.

[0031] The aforementioned gaskets and openings that are pierced according to the need serve to improve the protection against contact and/or splashes (IP class) of the switching device module.

[0032] It is obvious to a person skilled in the art that the basic idea of the invention can be implemented in a variety of ways. Consequently, the invention and its embodiments are not restricted to the above examples, but may vary within the scope of the claims.

CLAIMS

1. A switching device module comprising a frame (2), the switching device module being adapted to be connected to another switching device module for providing a modular switching device, **characterized** in that the frame (2) of the switching device module is provided with one or more wire troughs (8, 28), each of which is adapted to receive at least one wire of an auxiliary circuit of said modular switching device.

2. A switching device module as claimed in claim 1, **characterized** in that the frame (2) of the switching device module is substantially in the shape of a rectangular parallelepiped, and in that the wire troughs (8) are placed inside planes defining the parallelepiped.

3. A switching device module as claimed in claim 1 or 2, **characterized** in that the frame (2) comprises an openable cover part (10), the cover part (10) constituting at least one wall of at least one wire trough (8).

4. A switching device module as claimed in claim 3, **characterized** in that it comprises a main shaft element (12), and in that said at least one wire trough (8), whose at least one wall is constituted by the openable cover part (10), is substantially parallel with the main shaft element (12).

5. A switching device module as claimed in claim 4, **characterized** in that said at least one wire trough (8), whose at least one wall is constituted by the openable cover part (10), extends linearly through the frame (2).

6. A switching device module as claimed in claim 4 or 5, **characterized** in that it comprises at least one wire trough (28) extending substantially perpendicularly relative to the main shaft element (12).

7. A switching device module as claimed in claim 6, **characterized** in that the switching device module comprises a cover side (4) and a bottom side (6), which are substantially parallel and located opposite each other, the bottom side (6) being adapted to be installed adjacent to a wall of an assembly space, such as a cubicle, and in that the switching device module comprises at least one wire trough (28) extending substantially perpendicularly relative to the cover side (4).



8. A switching device module as claimed in any one of the preceding claims, **characterized** in that it comprises at least one wire trough



(28) having one open longitudinal side facing the exterior of the module.


9. A switching device module as claimed in claim 8, **characterized** in that the wire trough (28) having one open longitudinal side is located on such a side of the switching device module that is adapted to be positioned against an adjacent switching device module.

10. A switching device module as claimed in any one of claims 1 to 9, **characterized** in that said wire of an auxiliary circuit of the switching device is a wire of a fuse monitor of a switch-fuse.

11. A switching device module as claimed in any one of claims 1 to 9, **characterized** in that said wire of an auxiliary circuit of the switching device is a wire of an auxiliary contact (25).

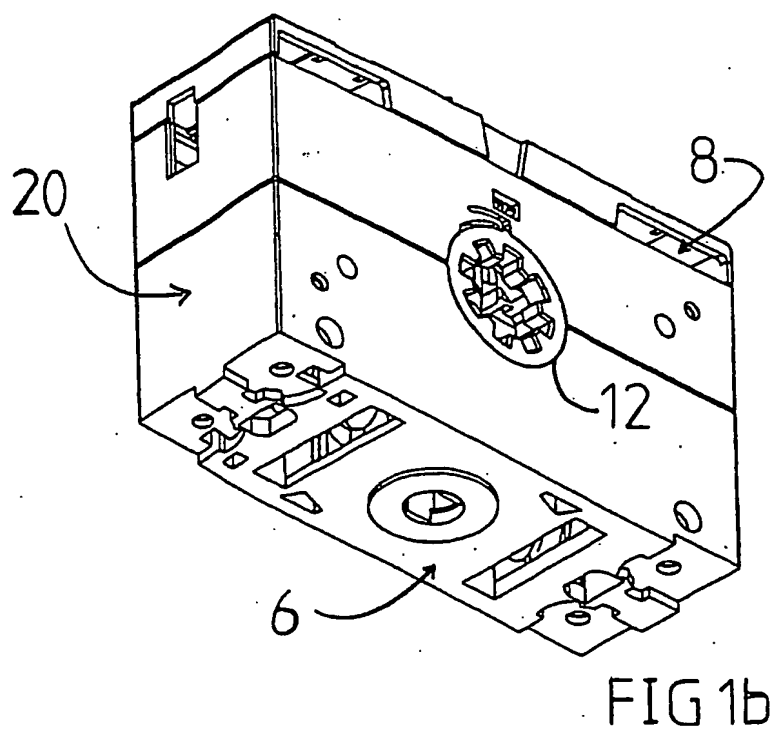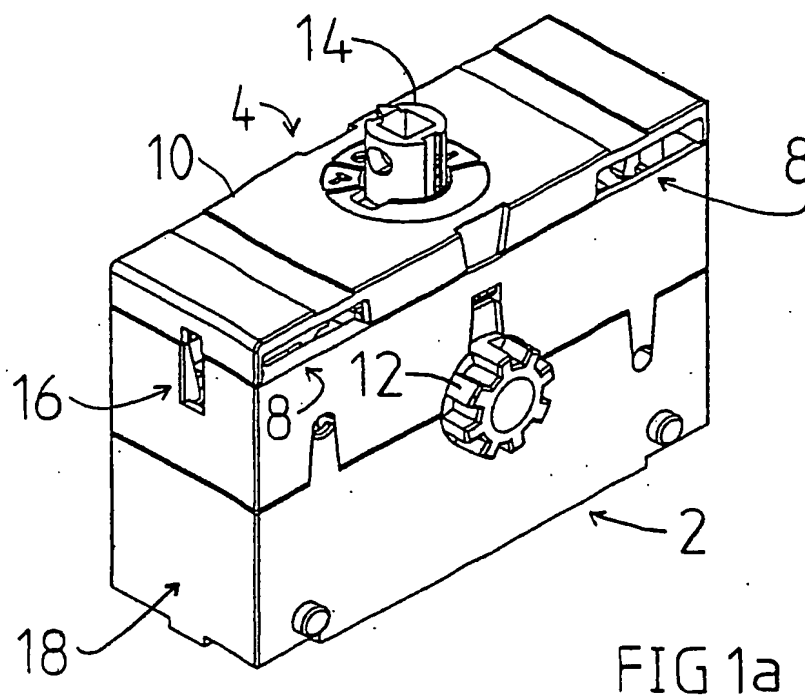

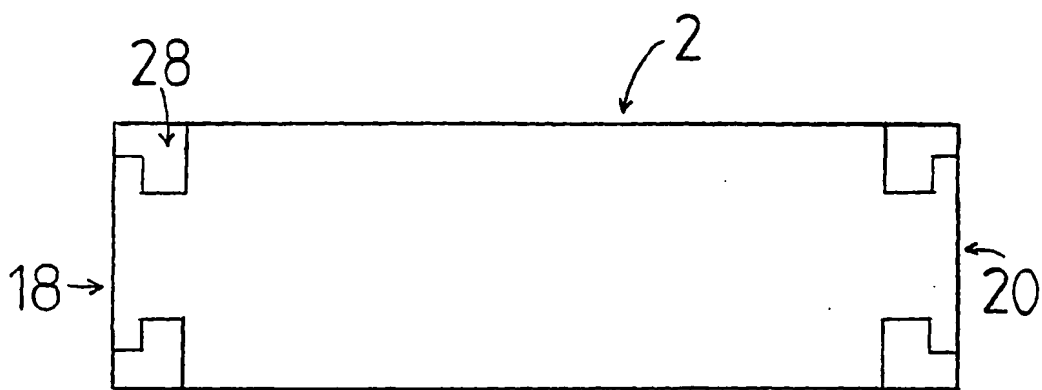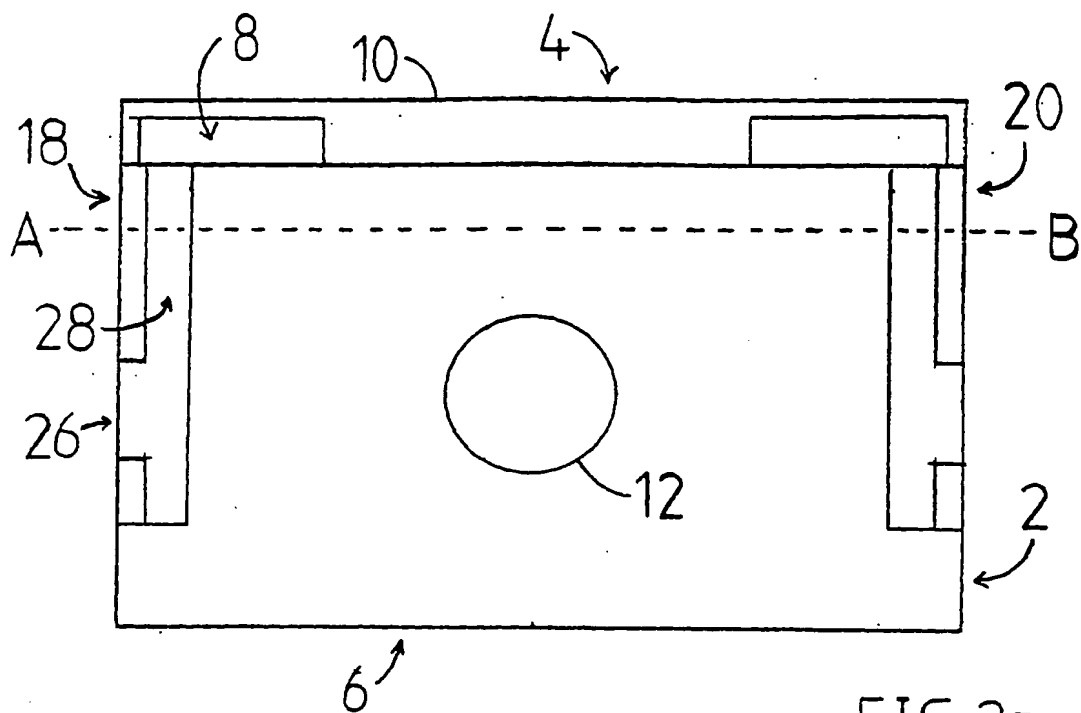

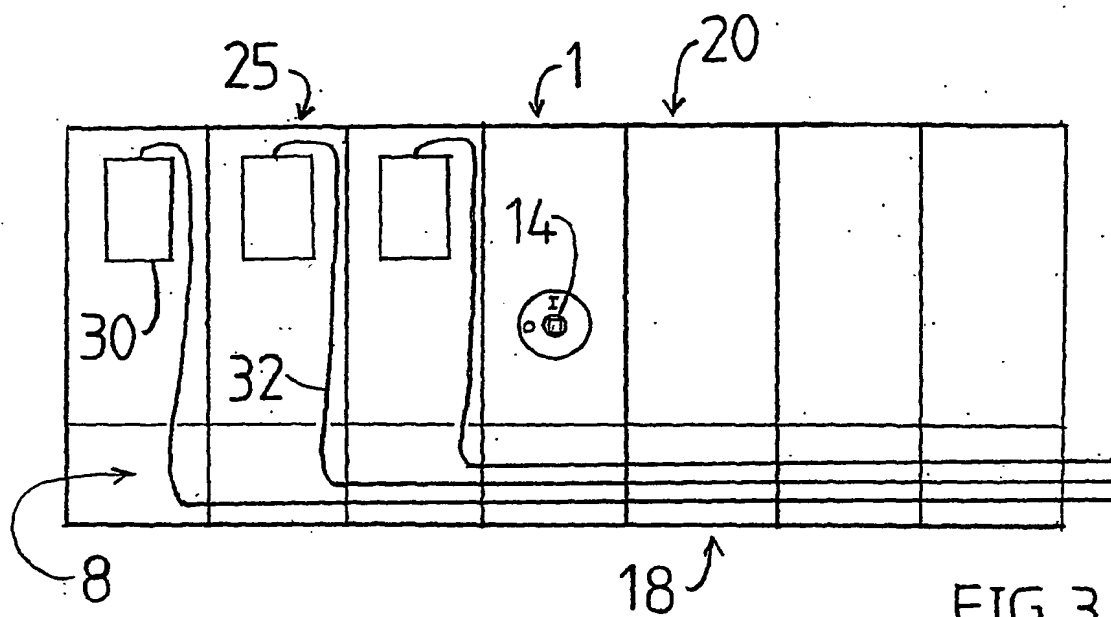

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 2005/000026

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H01H 71/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H01H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FR 2787238 A1 (SCHNEIDER ELECTRIC INDUSTRIES SA), 16 June 2000 (16.06.2000), abstract, see the figures --	1
A	US 5298874 A (ROBERT MOREL ET AL), 29 March 1994 (29.03.1994), column 4, line 64 - line 68, see the figures -- -----	1

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

2 May 2005

Date of mailing of the international search report

11-05-2005

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Magnus Westöö/MN
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

01/04/2005

International application No.
PCT/FI 2005/000026

FR	2787238	A1	16/06/2000	CN	1257297 A	21/06/2000
				ES	2164572 A	16/02/2002
				IT	1309382 B	22/01/2002
				IT	VR990100 A	04/06/2001
<hr/>						
US	5298874	A	29/03/1994	AT	148960 T	15/02/1997
				AU	660489 B	29/06/1995
				AU	2639692 A	22/04/1993
				BR	9203996 A	27/04/1993
				CA	2080064 A,C	16/04/1993
				CN	1041361 B,C	23/12/1998
				CN	1071784 A	05/05/1993
				DE	69217441 D,T	10/07/1997
				EP	0538149 A,B	21/04/1993
				SE	0538149 T3	
				ES	2099235 T	16/05/1997
				FR	2682530 A,B	16/04/1993
				JP	3392441 B	31/03/2003
				JP	5217489 A	27/08/1993
				MX	9205924 A	01/04/1993
				ZA	9207904 A	21/04/1993
